


# DigiTrak<sup>®</sup> DucTrak<sup>™</sup> Conduit Tracking System

The DigiTrak<sup>®</sup> DucTrak<sup>™</sup> system, which includes a DigiTrak<sup>®</sup> receiver and a DucTrak<sup>™</sup> transmitter, is used to track existing non-metallic ducts. This system has the customary reliability and precision associated with all DigiTrak<sup>®</sup> locating systems.

## Easy to Use

The DucTrak<sup>™</sup> transmitter is designed specifically for projection through existing conduit systems to determine the exact location of the duct. A pulling eye at the nose end of the transmitter permits a mule tape or rope attachment. The transmitter can also be threaded onto a rodding device and pushed through the duct.

There are three types of end caps for rodding use: 3/8 in., 5/16 in., and 12 mm. A pulling-eye end cap is also available for another rope attachment.

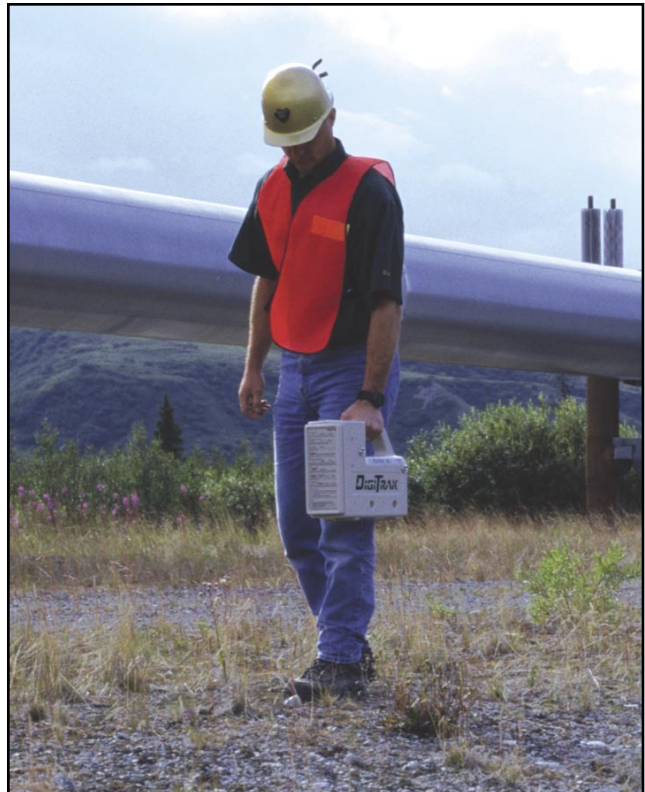

## Accurate Tracking Data

The hand-held DigiTrak<sup>®</sup> receiver tracks the depth and lateral position of the DucTrak<sup>™</sup> transmitter as it advances inside the duct. The receiver displays information sent from the transmitter. There are two transmitter sizes: a 12-in. (305-mm) model with a range of 100 ft (30.5 m), and a 6-in. (152-mm) model with a range of 50 ft (15.2 m).

- Determines depth of existing duct
- Determines lateral position of duct
- Range of up to 100 ft (30.5 m)
- Easy attachment for pulling/pushing through duct
- Use with any DigiTrak<sup>®</sup> Mark series equipment



## DucTrak<sup>™</sup> Tx Specifications

Model numbers.....	DDTS, DDT
Range.....	50 ft (15.2 m) or 100 ft (30.5 m)
Frequency.....	33 kHz
Battery type.....	123 3V lithium
Battery life.....	8–12 hr (approx.)
Operating temperature range.....	22°F to 122°F (-5.6°C to 50°C)
Diameter.....	0.875 in. (22 mm)
Length.....	6 in. (152 mm) or 12 in. (305 mm)
Weight.....	4.5 oz (127 g) or 8.4 oz (240 g)



### DCI Headquarters

19625 62<sup>nd</sup> Ave. S., Suite B-103, Kent, WA 98032 USA  
Tel 800 288 3610 / 425 251 0559 • Fax 253 395 2800  
E-mail DCI@digital-control.com • [www.digitrak.com](http://www.digitrak.com)

**DCI Europe**, Kurmainzer Strasse 56, D-97836 Bischbrunn, Germany • T +49(0) 9394 990 990 • F +49(0) 9394 990 999 • DCI.Europe@digital-control.com  
**DCI Australia**, 2/9 Frinton Street, Southport, Queensland 4215, Australia • T +61(0) 7 5531 4283 • F +61(0) 7 5531 2617 • DCI.Australia@digital-control.com  
**DCI India**, SCO # 259, Sector 44-C, Chandigarh (UT) 160 047, Punjab, India • T +91(0) 172 464 0444 • F +91(0) 172 464 0999 • DCI.India@digital-control.com  
**DCI China**, USA Excalibre, 2803 Bldg C, 70 Cao Bao Rd, Shanghai P.R.C. 200233 • T +86(0) 21 6432 5186 • F +86(0) 21 6432 5187 • DCI.China@digital-control.com